



TP6/V

cutting bending
machine for axial
components
vertical mounting

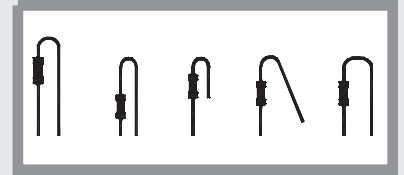

TP6/V with Reel Holder BR6

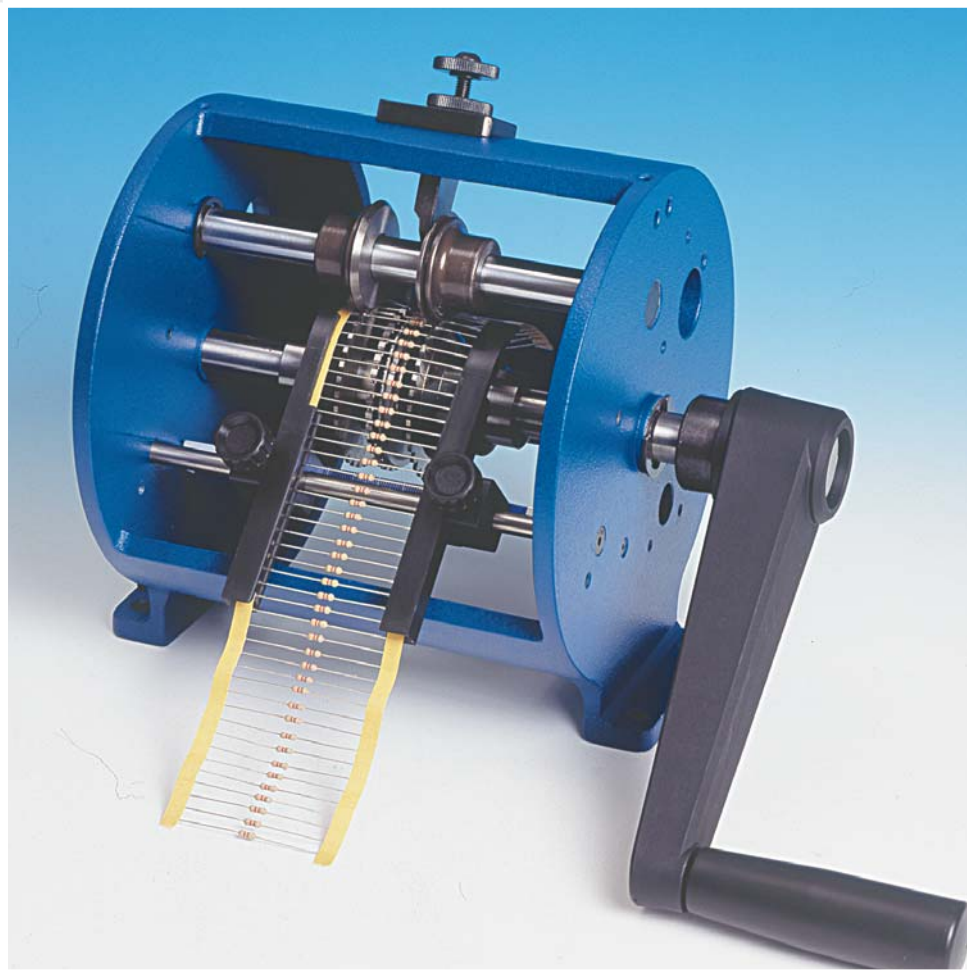

TP6/V with MOT98 Motor and
CS30 Feeder



TP6/V with Tape Ejector TNS


LEAD DIA. = 0,5-0,8 mm - 0,8-1,3 mm
(.019- .031" - .031 - .051")
PRODUCTION = TAPED 50000 p/h
LOOSE = 5000 p/h

LENGTH = 23 cm
WIDTH = 18 cm
HEIGHT = 21 cm
PACKING = 39x25x26 cm
VOLUME = 0,025 m³
MACHINE WEIGHT = 5 kg
GROSS WEIGHT = 6 kg

The model TP6/V is designed for cutting and bending taped axial components for vertical mounting. The machine is manufactured in two versions: the first one for components with lead diameter from 0.5 to 0.8 mm (.019 to .031 inc.) and the second for lead diameter from 0.8 to 1.3 mm (.031 to .051 inc.). The bending pitch, which is determined by the bending cam supplied, can be changed by replacing the cam with one of the other size cams. The CS30 loose component feeder is an accessory that attaches to the TP6/V to handle loose parts. Its assembly to the machine is very quick and easy. The Motor drive unit MOT98 driving with foot pedal also, and adjustable speed, will make the operation automatic and will increase the production with both taped and loose components. When working with components on tape and reel we suggest the use of the BR6 reel holder. The TNS is an accessory that helps with the ejection of the waste tape.


STANDARD VERSIONS FOR COMPONENTS WITH LEAD DIAMETER 0,5 TO 0,8 mm (.019 TO .031 inch)

TP6/V/1 STANDARD VERSION PITCH 2,54 mm (.1")
(Cod. 80.OL01)




	MM		INCH	
	min	max	min	max
A	2	6	.078	.236
L		15		.590
F	3	8	.118	.314
D	0,5	3	.019	.118
d	0,5	0,8	.019	.031
P	2,54 fix		.1 fix	

TP6/V/3 PITCH 3,8 mm (.15")
(Cod.80.OL03)




	MM		INCH	
	min	max	min	max
A	2,5	6	.098	.236
L		15		.590
F	3	8	.118	.314
D	0,5	5	.019	.196
d	0,5	0,8	.019	.031
P	3,8 fix		.15 fix	

TP6/V/4 PITCH 5,08 mm (.2")
(Cod.80.OL04)



	MM		INCH	
	min	max	min	max
A	3	7	.118	.275
L		15		.590
F	3	8	.118	.314
D	0,5	8	.019	.314
d	0,5	0,8	.019	.031
P	5,08 fix		.2 fix	


TP6/V/5 PITCH 7,62 mm (.3")
(Cod.80.OL05)



	MM		INCH	
	min	max	min	max
A	4	7	.157	.275
L		15		.590
F	3	8	.118	.314
D	0,5	10	.019	.393
d	0,5	0,8	.019	.031
P	7,62 fix		.3 fix	


STANDARD VERSIONS FOR COMPONENTS WITH LEAD DIAMETER 0,8 TO 1,3 mm (.031 TO .051 inch)

TP6/V/21 PITCH 3,8 mm (.15")
(Cod.80.OL21)




	MM		INCH	
	min	max	min	max
A	4	9	.157	.354
L		15		.590
F	3	8	.118	.314
D	0,8	5	.031	.196
d	0,8	1,3	.031	.051
P	3,8 fix		.15 fix	

TP6/V/22 PITCH 5,08 mm (.2")
(Cod.80.OL22)



	MM		INCH	
	min	max	min	max
A	5	9	.196	.354
L		15		.590
F	3	8	.118	.314
D	0,8	8	.031	.314
d	0,8	1,3	.031	.051
P	5,08 fix		.2 fix	

TP6/V/23 PITCH 7,62 mm (.3")
(Cod.80.OL23)



	MM		INCH	
	min	max	min	max
A	6	9	.236	.354
L		15		.590
F	3	8	.118	.314
D	0,8	10	.031	.393
d	0,8	1,3	.031	.051
P	7,62 fix		.3 fix	