
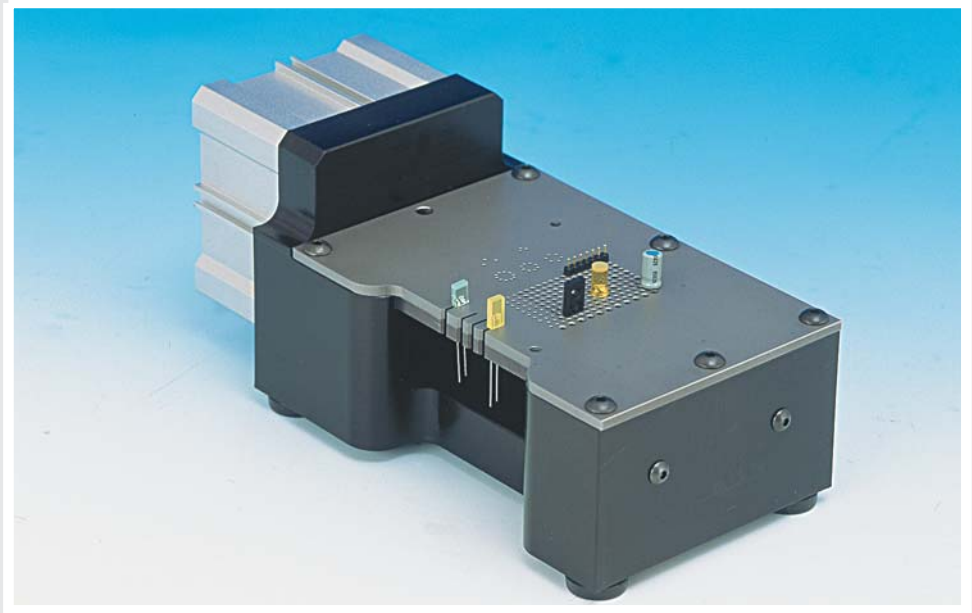


TP/LN 100

pneumatic
cutting machine
for loose
radial
components

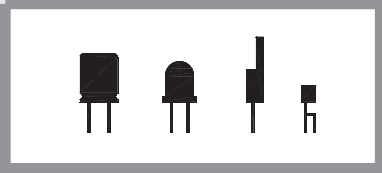


TP/LN-100

cutting area 45x54 mm (1.77 x2.12")
(Cod.36.OL01)

LENGTH = 21 cm
WIDTH = 10 cm
HEIGHT = 10 cm
PACKING = 39x25x26 cm
VOLUME = 0,025 m³
MACHINE WEIGHT = 3 kg
GROSS WEIGHT = 5 kg

LEAD DIA. = 0,3 - 1 mm (.011-.039")
PRODUCTION = 3.000 p/h

	MM			INCH		
	min	max	fix	min	max	fix
L			3,2			.125
d	0,3	1		.011	.039	



The pneumatic machine TP/LN-100 is used for cutting the leads of loose radial components. It was designed to adapt to a very wide range of radial parts.

The upper stationary plate determines the cutting height; the standard is = 3,2mm (.125 inc.). Additional plates to increase this height can be supplied upon request, starting from 0,5 mm (.019 inc.).

The pneumatic foot pedal controls the stroke of the lower plate, which performs a quick cut of the leads, without any stress to the components.

The plates have a standard grid pattern, to accommodate most types of components. Plates with special grid pattern can be provided upon request.

Lateral cuts at most common pitches allow to easily handle warped leads.