



0.110" (2.79mm) Quick Disconnect Terminals

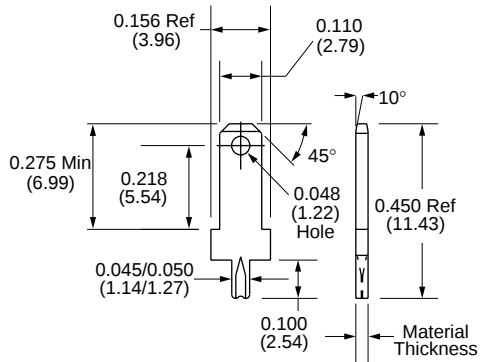

Loose Part No.	1063	1064
Reeled Part No.	6063-6	6064-6
Mounting Type	Accu-Lok™ Splay	Accu-Lok™ Splay
Material Thickness/Type	0.020" (0.51mm) Brass	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Matt Tin over Copper Reeled: 95/5 Matt Tin/Lead over Copper	
Mounting Hole Diameter	0.055" ±0.003" (1.40mm ±0.076mm)	0.061" ±0.003" (1.55mm ±0.076mm)
Applicator System	Loose: ZPT81-A Reeled: Model 9700, 9718	


U.S. Patent No. 5,017,159

For exact finish specifications and available special finishes, see Finish Table (page 91).

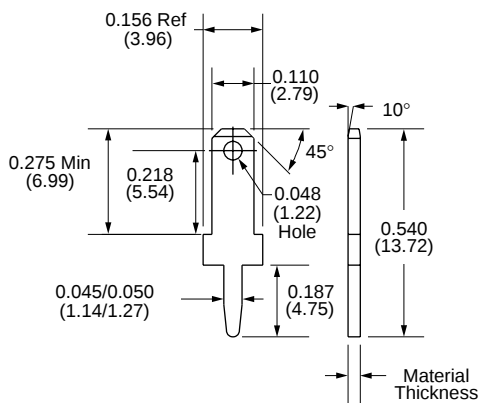

Loose Part No.	834	835
Reeled Part No.	6834-6	6835-6
Mounting Type	Press-Fit	Press-Fit
Material Thickness/Type	0.020" (0.51mm) Brass	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Matt Tin over Copper Reeled: 95/5 Matt Tin/Lead over Copper	
Mounting Hole Diameter	0.044" ±0.003" (1.12mm ±0.076mm)	0.050" ±0.003" (1.27mm ±0.076mm)
Applicator System	Loose: ZPT81-A Reeled: Model 7000, 9700, 9718	

For exact finish specifications and available special finishes, see Finish Table (page 91).

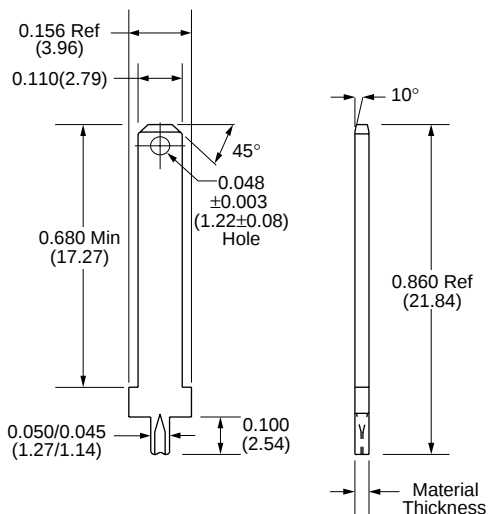

Loose Part No.	1201
Reeled Part No.	6201-6
Mounting Type	Accu-Lok™ Splay
Material Thickness/Type	0.032" (0.81mm) Brass
Standard Finish	Loose: 100% Matt Tin over Copper Reeled: 95/5 Matt Tin/Lead over Copper
Mounting Hole Diameter	0.055" ±0.003" (1.40mm ±0.076mm)
Applicator System	Loose: ZPT81-A Reeled: 9700, 9718

U.S. Patent No. 5,017,159

For exact finish specifications and available special finishes, see Finish Table (page 91).