


M2.5

Female – Female

Polyamide Max Temp 110°C



Dimensions in mm

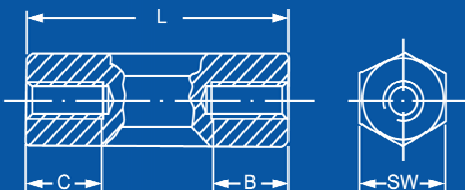

L Length	Brass Nickel Plated				Polyamide							
	Part #	C	B	SW	Part #	C	B	SW				
5	10.2560.05	2.5	2.5	4	10.2562.05	2.5	2.5	5				
6	10.2560.06	3	3	4	10.2562.06	3	3	5				
7					10.2562.07	3.5	3.5	5				
8	10.2560.08	4	4	4	10.2562.08	4	4	5				
9					10.2562.09	4.5	4.5	5				
10	10.2560.10	5	5	4	10.2562.10	5	5	5				
11					10.2562.11	5.5	5.5	5				
12	10.2560.12	6	6	4	10.2562.12	6	6	5				
13					10.2562.13	6.5	6.5	5				
14					10.2562.14	7	7	5				
15	10.2560.15	7.5	7.5	4	10.2562.15	7.5	7.5	5				
16					10.2562.16	8	8	5				
17					10.2562.17	8.5	8.5	5				
18	10.2560.18	9	9	4	10.2562.18	9	9	5				
19					10.2562.19	9.5	9.5	5				
20	10.2560.20	10	10	4	10.2562.20	10	10	5				
21					10.2562.21	10	10	5				
22					10.2562.22	10	10	5				
23					10.2562.23	10	10	5				
24					10.2562.24	10	10	5				
25	10.2560.25	10	10	4	10.2562.25	10	10	5				
26					10.2562.26	10	10	5				
27					10.2562.27	10	10	5				
28					10.2562.28	10	10	5				
29					10.2562.29	10	10	5				
30	10.2560.30	10	10	4	10.2562.30	10	10	5				
32					10.2562.32	10	10	5				
35	10.2560.35	10	10	4	10.2562.35	10	10	5				
40	10.2560.40	10	10	4	10.2562.40	10	10	5				
45	10.2560.45	10	10	4	10.2562.45	10	10	5				
50	10.2560.50	10	10	4	10.2562.50	10	10	5				
55	10.2560.55	10	10	4	10.2562.55	10	10	5				
60	10.2560.60	10	10	4	10.2562.60	10	10	5				

Dimensional changes or custom parts made to order. Call us for a quote