


M3

Male - Female

Plastic body with metal insert & brass stud
 Polyamide Max Temp 110°C
 Polystyrene Max Temp 70°C
 Polystyrene Rating UL 94-V2

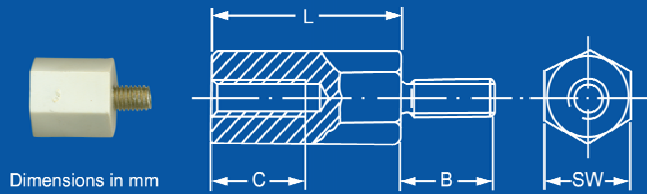

L Length	Polyamide + Brass Insert Hex				Polyamide + Brass Insert Round				Polystyrene + Steel, Brass Insert Hex			
	Part #	C	B	SW	Part #	C	B	dia	Part #	C	B	SW
10					10.3047.10	6	6	6.5		6	6	6
15	10.3046.15	6	6	6.35	10.3047.15	6	6	6.5	10.3048.15	6	6	6
20	10.3046.20	6	6	6.35	10.3047.20	6	6	6.5	10.3048.20	6	6	6
25	10.3046.25	6	6	6.35	10.3047.25	6	6	6.5	10.3048.25	6	6	6
30	10.3046.30	6	6	6.35	10.3047.30	6	6	6.5	10.3048.30	6	6	6
35	10.3046.35	6	6	6.35	10.3047.35	6	6	6.5	10.3048.35	6	6	6
40	10.3046.40	6	6	6.35	10.3047.40	6	6	6.5	10.3048.40	6	6	6
45	10.3046.45	6	6	6.35	10.3047.45	6	6	6.5	10.3048.45	6	6	6
50	10.3046.50	6	6	6.35	10.3047.50	6	6	6.5	10.3048.50	6	6	6
55					10.3047.55	6	6	6.5	10.3048.55	6	6	6
60					10.3047.60	6	6	6.5				
65					10.3047.65	6	6	6.5				
70					10.3047.70	6	6	6.5				
75					10.3047.75	6	6	6.5				
80					10.3047.80	6	6	6.5				
85					10.3047.85	6	6	6.5				
90					10.3047.90	6	6	6.5				
95					10.3047.95	6	6	6.5				
100					10.3047.100	6	6	6.5				
105					10.3047.105	6	6	6.5				

Dimensional changes or custom parts made to order. Call us for a quote