


M4

Male - Female

Plastic body with metal insert & brass stud
 Polyamide Max Temp 110°C
 Polystyrene Max Temp 70°C
 Polystyrene Rating UL 94-V2

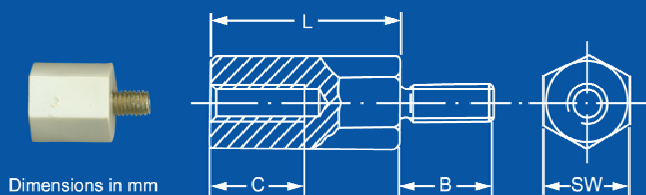

L Length	Polyamide + Brass Insert Hex				Polyamide + Brass Insert Round				Polystyrene + Steel, Brass Insert Hex			
	Part #	C	B	SW	Part #	C	B	dia	Part #	C	B	SW
10									10.4047.10	7	7	9
15	10.4045.15	6	6	8	10.4046.15	6	6	8,0	10.4047.15	7	7	9
20	10.4045.20	6	6	8	10.4046.20	6	6	8,0	10.4047.20	7	7	9
25	10.4045.25	6	6	8	10.4046.25	6	6	8,0	10.4047.25	7	7	9
30	10.4045.30	6	6	8	10.4046.30	6	6	8,0	10.4047.30	7	7	9
35	10.4045.35	6	6	8	10.4046.35	6	6	8,0	10.4047.35	7	7	9
40	10.4045.40	6	6	8	10.4046.40	6	6	8,0	10.4047.40	7	7	9
45	10.4045.45	6	6	8	10.4046.45	6	6	8,0	10.4047.45	7	7	9
50	10.4045.50	6	6	8	10.4046.50	6	6	8,0	10.4047.50	7	7	9
55					10.4046.55	6	6	8,0	10.4047.55	7	7	9
60					10.4046.60	6	6	8,0	10.4047.60	7	7	9
65					10.4046.65	6	6	8,0	10.4047.65	7	7	9
70					10.4046.70	6	6	8,0	10.4047.70	7	7	9
75					10.4046.75	6	6	8,0	10.4047.75	7	7	9
80					10.4046.80	6	6	8,0	10.4047.80	7	7	9
85					10.4046.85	6	6	8,0	10.4047.85	7	7	9
90					10.4046.90	6	6	8,0	10.4047.90	7	7	9
95					10.4046.95	6	6	8,0				
100					10.4046.100	6	6	8,0				
105					10.4046.105	6	6	8,0				

Dimensional changes or custom parts made to order. Call us for a quote